



## ACONITE ESC4062L-NM

Supply Voltage	220-240VAC   50/60Hz
Wattage	3W
Battery Specifications	3.6V 3.0Ah Ni-Cad Battery
Light Source	2x30 pcs White LED
Emergency Time	3 hours
Charging Time	24 hours
Emergency Mode	Non Maintained
Operating Temperature	0°-40°C
Mounting Options	Wall Mount
Luminous Flux	220lm
Color Temperature	6000K
IP Rating	IP65
Material	Polycarbonate body
Product dimensions (In mm)	292x68x279



IP 65



Light Source  
LED



TUV  
Certified



Recycle as  
appropriate



0°-40°C



3 hours


### Key Features:

- Polycarbonate body
- Uses highly active LED light source
- High brightness, Long life
- Easy installation and maintenance
- Rated to IP65


### Ordering Codes:

ESC4062L-NM -  
Emergency luminaire, Wall Mount

Product Size: (L X W X H)



Luminous Efficiency

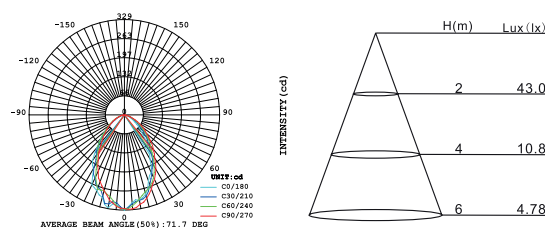

Specifications are subject to change without notice.

For further information, please contact:

Teknoware Middle East FZCO,

#601, 4WA, DAFZA, Dubai, United Arab Emirates.

Tel.: +971 4 299 3622 | Fax.: + 971 4 299 3623 | info@teknoware.ae