



## CYAN (STANDARD) ESC0632

Supply Voltage	220-240VAC   50-60Hz
Wattage	7W
Battery Specifications	3.6V 3Ah Ni-Cad Battery
Light Source	20pcs LED
Emergency Time	3 hours
Charging Time	24 hours
Emergency Mode	Non Maintained/Maintained*
Operating Temperature	-5°-45°C
Mounting Options	Wall Mount/Surface Mount/ Semi-Recess Mount
Luminous Flux	180lm
Color Temperature	6000-6500k
IP Rating	IP65
Material	Fire retardant ABS housing
Product dimensions (In mm)	354.4x117.8x77.8



IP 65



Light Source  
LED



UL  
Listed



Recycle as  
appropriate



-5°-45°C



3 hours

### Key Features:

- High precision moulding, fire retardant ABS housing
- Semi-recessed option available
- Uses highly active LED light source
- High brightness, Long life
- Easy installation and maintenance
- Rated to IP65

### Ordering Codes:


ESC0632 -  
Emergency luminaire, Surface Mount

### Accessories:

- Semi-recess mounting frame
- Pictograms:
  - ▶ Right arrow
  - ▶ Left arrow
  - ▶ Down arrow



Product Size: (L X W X H)

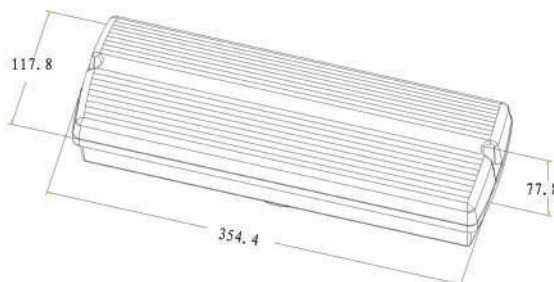

\*Maintained exit light available on request

Specifications are subject to change without notice.

For further information, please contact:

Teknoware Middle East FZCO,

#601, 4WA, DAFZA, Dubai, United Arab Emirates.

Tel.: +971 4 299 3622 | Fax.: + 971 4 299 3623 | info@teknoware.ae