



AURA ESC0911L-M

Supply Voltage	220-240VAC 50/60Hz
Wattage	4W
Battery Specifications	3.6V 1.5Ah Ni-Cad Battery
Light Source	10 pcs LED
Emergency Time	3 hours
Charging Time	24 hours
Emergency Mode	Maintained/Non Maintained
Operating Temperature	0°-40°C
Mounting Options	Wall Mount/Ceiling Mount/ Surface Mount
Luminous Flux	190lm
Viewing Distance	30m [ceiling mount] 25m [wall mount]
Color Temperature	6000K
IP Rating	IP65
Material	Polycarbonate body and diffuser
Product dimensions (In mm)	352x110x218 [ceiling mounted exit] 352x110x55 [emergency/ wall mounted exit]



IP 65



Light Source
LED



TUV
Certified



Recycle as
appropriate



0°-40°C



3 hours


Key Features:

- High precision moulded housing made from fire retardant ABS housing
- Uses highly active LED light source
- High brightness, Long life
- Easy installation and maintenance
- Rated to IP65
- Can be used as emergency luminaire & exit luminaire

Ordering Codes:

ESC0911L-M -
Emergency luminaire, Surface Mount
Exit luminaire, Wall Mount
Exit luminaire, Ceiling Mount

Product Size: (L X W X H)

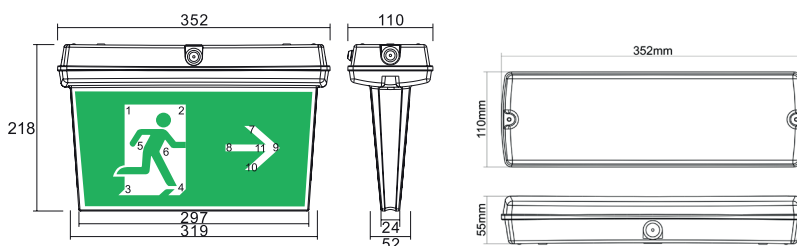

Accessories:

- Semi-recess mounting frame
- Pictograms:
 - ▶ Right arrow
 - ▶ Left arrow
 - ▶ Down arrow
 - ▶ Right/Left (double sided) arrow



Specifications are subject to change without notice.

For further information, please contact:

Teknoware Middle East FZCO,

#601, 4WA, DAFZA, Dubai, United Arab Emirates.

Tel.: +971 4 299 3622 | Fax.: + 971 4 299 3623 | info@teknoware.ae